


GENERATOR ACCESSORIES

KOHLER POWER SYSTEMS

Generator Set Controller

ISO 9001
KOHLER
GENERATORS
INTERNATIONALLY REGISTERED

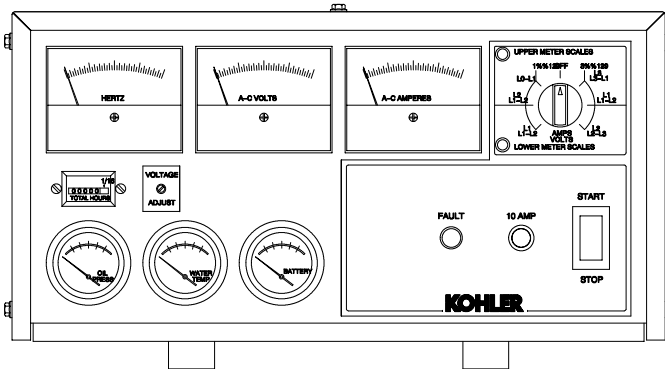

Manual Controller

Applicable to the following:

20RZ
20-180ROZJ/REOZJ
20-170ROZK

- Compatible with 12-volt engine electrical systems only
- Designed for prime power and mobile applications
Offers ruggedness and simplicity as well as monitoring and diagnostics
- Vibration isolated from the engine/generator
- Ambient temperature operating range -40°C to 85°C
(-40°F to 185°F)

Standard Features

- Dimensions, W x H x D, mm (in.):
461 x 252 x 297 (18.15 x 9.91 x 11.68)
- Drip-proof enclosure is vibration isolated to the generator enclosure.
Control relays and diagnostic indicators are hinge panel mounted for accessibility and wired by an error-proof plug.
- Panel lamps (2)
- Analog gauges, 51 mm (2 in.):
 - Pressure gauge, oil
 - Temperature gauge, engine water
 - Voltmeter, DC battery
- Analog meters, 89 mm (3.5 in.):
 - AC ammeter, 2% full-scale accuracy
 - AC voltmeter, 2% full-scale accuracy
 - Frequency meter, 0.5% full-scale accuracy
- Fault shutdowns with common lamp:
 - Level, low coolant
 - Overspeed
 - Pressure, low oil
 - Temperature, high water
- Running time meter
- Switches and controls:
 - Pushbutton, start/stop momentary
 - Rheostat, generator output voltage-adjusting
(front panel mounted, $\pm 5\%$ of nominal voltage)
 - Switch, meter range selector

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.

KOHLER CO., Kohler, Wisconsin 53044 U.S.A.
Phone 920-565-3381, Web site www.kohlergenerators.com
Fax 920-459-1646 (U.S.A. Sales), Fax 920-459-1614 (International)
For the nearest sales and service outlet in U.S.A. and Canada
Phone 1-800-544-2444

Kohler Power Systems
Asia Pacific Headquarters
7 Jurong Pier Road
Singapore 619159
Phone (65)264-6422, Fax (65)264-6455

DISTRIBUTED BY: